






mailboxes and more ...



LED ILLUMINATION



MODELL: BE-LED

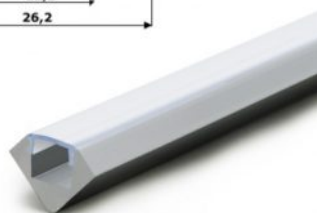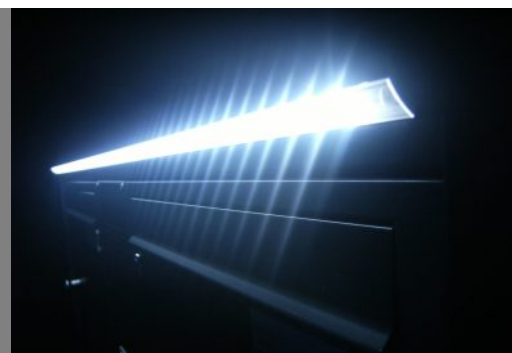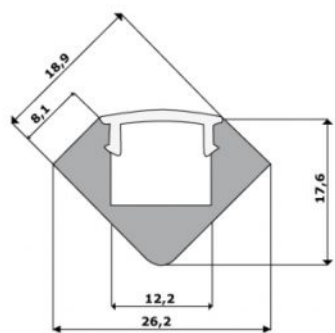

D – HOCHWERTIGES ALUMINIUMPROFIL

– LED-LEISTE FARBE KALTWEISS, 12VDC,
720 LM/M, 4.000-4.500K, IP-65
VERBRAUCH CA. 9W / METER

– LED NETZTEIL / INPUT 220V (AC90-265V) | IP-67
LED-STREIFEN > 1 METER OUTPUT 30W/12V 2.5A
LED-STREIFEN < 1 METER OUTPUT 15W/12V 2.5A

I – PROFILO IN ALLUMINIO DI
1° QUALITÀ

– BARRA LED COLORE BIANCO FREDDO,
12VDC, 720LM/M 4.000-4.500K, IP-65
CONSUMO CA. 9W A METRO

– ALIMENTATORE LED / INPUT 220V (AC90-265V) | IP-67
LED-BANDA > 1 METRO OUTPUT 30W/12V 2.5A
LED-BANDA < 1 METRO OUTPUT 15W/12V 2.5A

F – ALUMINIUM PROFILE TOP QUALITY

– LED-BAND, COLOUR COLD WHITE, 12VDC,
720LM/M / 4.000-4.500K, IP-65
CONSUMATION CA. 9W PAR MÈTRE

– LED POWER PACK / INPUT 220V (AC90-265V) | IP-67,
LED-STRIP > 1 MÈTRE OUTPUT 30W/12V/2.5A
LED-STRIP < 1 MÈTRE OUTPUT 15W/12V/2.5A

E – PROFIL D'ALUMINIUM HAUT DE
GAMME

– LED-BANDE, COULEUR BLANC FROID, 12VDC
720 LM/M - 4.000-4.500K, IP-65
CONSUMPTION APPROX. 9W PER METER

– LED ALIMENTATION ÉLEC / INPUT 220V (AC90-265V) | IP-67
LED-BANDE > 1 METER OUTPUT 30W/12V 2.5A
LED-BANDE < 1 METER OUTPUT 15W/12V 2.5A